


## DCS 302 – DUAL CYLINDER SCALES

The DCS302 is a rugged, dependable weighing system for two compressed gas cylinders, providing an independent, accurate, highly visible and readable indication of the weight on each weigh platform. Clearly the most advanced design available, the DCS302 incorporates features that eliminate most of the problems which plague similar competitive scales. The scale base is warranted for a full 5 years. The NEMA 4X-housed EI-2000 Dual Channel indicator Transmitter is provided for local weight display and parameter adjustment.

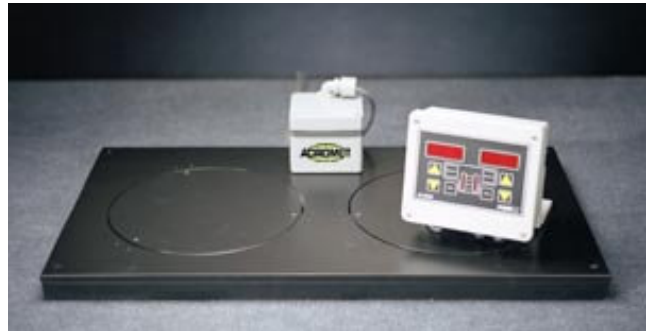

### FEATURES

- Non-corroding, highly impact resistant plastic scale base warranted for 5 years.
- Electronics and environmentally sealed load cells mounted in NEMA 4X enclosure on top of scale base.
- Sensing elements mounted above weighing surface away from sources of corrosion and easily accessible for service.
- Reliable lever type weigh system.
- No long support column eliminates deflection errors.
- Cylinder support bracket and chains wall mounted for added safety (optional)
- Factory assembled and ready for use.

### Ideal for Corrosive Environments

The scale base is manufactured from solid PVC, which will not corrode and is highly impact resistant. The scale base has two independent weighing platforms, one for each of two compressed gas cylinders.

The weight of each cylinder is transmitted to an environmentally sealed strain gauge load cell via a reliable, time-proven lever system. The scale electronics and load cells are mounted on top of the scale platform, away from most sources of corrosion, in an IP65 fibreglass enclosure ensuring full time integrity of the weighing system. 457.2 cm of multi-conductor load cell cable come with each scale. Additional cable can be ordered.

Because the scale has no support column, which traditionally houses cables or rods to transmit load to the cells, deflection errors associated with transmission rods or cables are completely eliminated.

The scale is furnished with a highly accurate EI-2000 Dual Channel Indicator/Transmitter which provides two large, independent LED displays and isolated 4-20 mAdc output signals, one for each weighing platform. The indicator is housed in an IP65 fibreglass enclosure for local field mounting. Refer to Product Data Sheet EI-1000/2000 for technical details and additional capabilities of the EI-2000 instrument.

Unlike other scales which mount a bracket and chains to the support column, the DSC302 can be optionally provided with a separate cylinder support bracket and safety chains designed for mounting to a wall to provide an additional margin of safety for user personnel.

DCS 302  
DUAL CYLINDER SCALE

ACROMET

[www.acromet.com.au](http://www.acromet.com.au)

### PHYSICAL SPECIFICATIONS


No. Of Platforms	2
Capacity	160 kg per platform
Cylinder Size	30.48 cm diameter max
Platform Height	4.1275 cm
Accuracy	± 0.25% full scale
Load Cell Nominal Outpour	0.9 mVN
Overload Capacity	150% rated capacity
Temperature Compensated Range	-1.1 - 46°C
Operating Temperature Range	-17.7 – 48.8°C
Hook-Up Cable	457.2 cm 6-Conductor
Cell Input voltage	5 – 15 VDC
Input Resistance	350 OHMS min.
Output Resistance	350 OHMS nom.
Shipping Weight	16.36 kg

### WEIGH INDICATOR SPECIFICATIONS

Display	Two 4-DIGIT, 0.56" 7 Segment LED
Input Range	-0.5 to 3.3 mVN
Output	Two 4-20 mAdc into 400 OHMS
Linearity	± 0.1%
Power Requirement	117 VAC, 48 to 62 Hz 220/440 VAC optional
Temperature Range	-10 to 40°C
Enclosure Type	NEMA 4X Surface Mount

### OPTIONS

Low Weight Alarm Relays*	AC – 250V, 1.3A DC – 440V, 1.3A
* customer to specify AC or DC	
Serial Communication	RS232 (2 wire) RS485
Indicator Enclosure	Stainless Steel
Cylinder Support Bracket and Safety Chains	
Floor MTG Stand for Indicator	

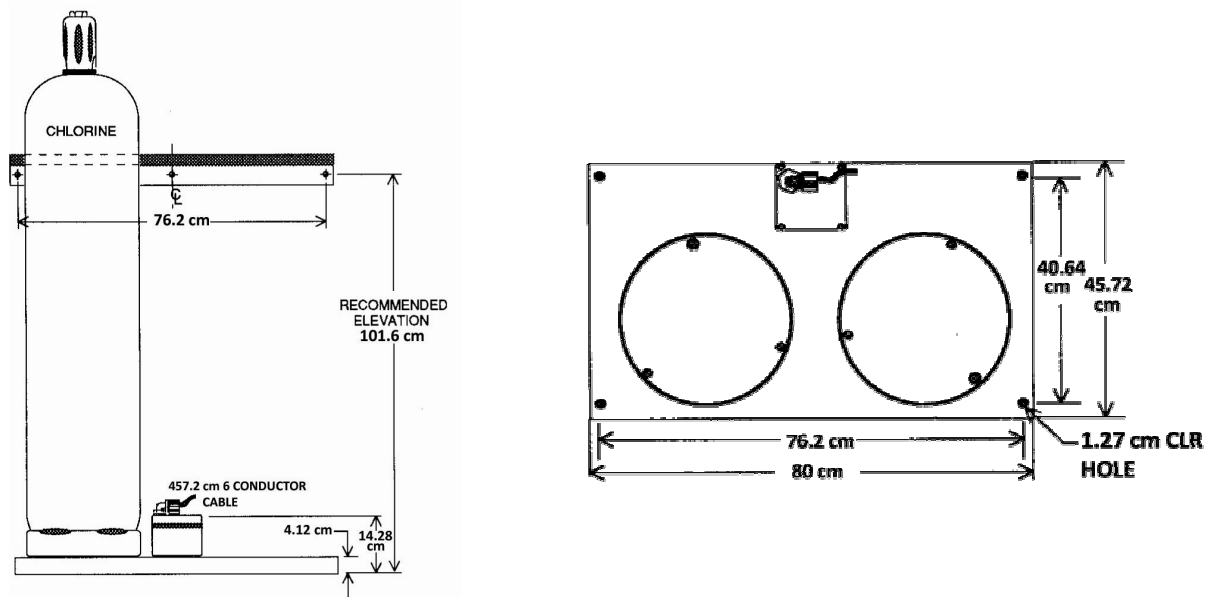

## Acromet (Aust) Pty Ltd

14 Winterton Road, Clayton, Victoria 3168  
 Ph: (03) 9544 7333 • Fax: (03) 9543 6706  
 Email: [chemex@acromet.com.au](mailto:chemex@acromet.com.au)

Suite 302, 63-79 Parramatta Road, Silverwater, NSW 2128  
 Ph: (02) 9647 2432 • Fax: (02) 9647 2599  
[www.acromet.com.au](http://www.acromet.com.au)