





## 2000 SERIES METERING PUMPS

### SELECTION GUIDE

CAPACITY/PRESSURE RATINGS – Litres per Hour						
Liquid End Code	PUMP SPEED (strokes / minute)					Pressure Rating
	46	72	92	112	136	
-001	1.29	2.02	2.58	3.14	3.8	1200
-002	6.36	10.0	12.7	15.5	18.8	1200
-005	12.1	18.8	24.1	29.4	35.6	1200
-015	40.6	63.5	81.1	98.8	120	700





### LABORATORY ACCURACY INDUSTRIAL DURABILITY

Based on the design of the renowned Acromet 3000 series – the industry benchmark for reliability.

The 2000 offers competitive chemical metering for lower pressure applications in an Australian made pump.

- Heavy duty mechanical actuation with a **5 year warranty** on the diaphragm.
- Standard motor – 0.18kW, 415V/3PH/50Hz, 4 pole IP55 TEFC drive.
- Simple rotary dial manual capacity adjustment with easy –to-read scale 0 – 100%
- No maintenance, oil filled mechanism.
- Proven rugged cast-iron gear box
- Self-cleaning valve operation
- Precise and positive volumetric displacement.
- Variable speed control and liquid end materials options.

Liquid End Code	DIMENSIONS				
	A	B	ØE	'F' BSPT(F)	
001	81	81	90	15mm (1/2")	
002	81	81	90	15mm (1/2")	
005	81	81	90	15mm (1/2")	
015	87	87	105	15mm (1/2")	
Max Weight 15 Kg					
Phase	C	D	G	H	ØJ
1Ø	183	102	82	60	140
3Ø	172	95	75	60	124

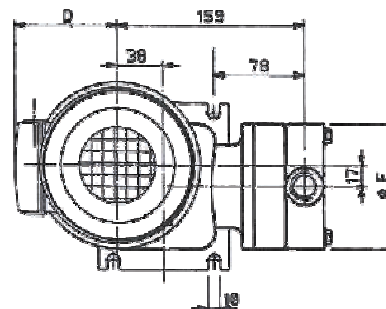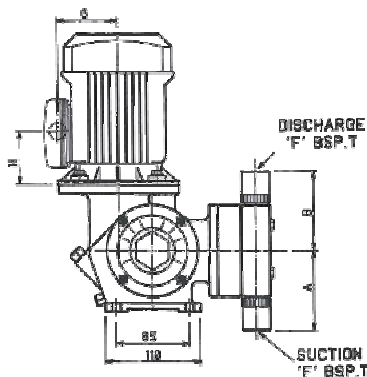

## Acromet (Aust) Pty Ltd

14 Winterton Road, Clayton, Victoria 3168  
Ph: (03) 9544 7333 • Fax: (03) 9543 6706  
Email: [chemex@acromet.com.au](mailto:chemex@acromet.com.au)

Suite 302, 63-79 Parramatta Road, Silverwater, NSW 2128  
Ph: (02) 9647 2432 • Fax: (02) 9647 2599  
[www.acromet.com.au](http://www.acromet.com.au)